
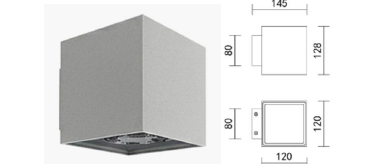
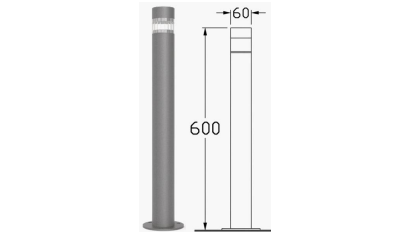
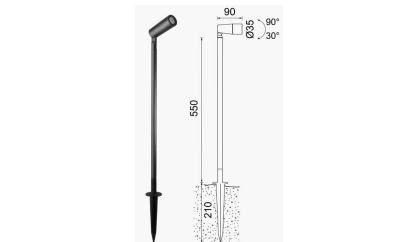
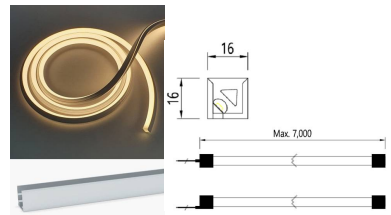
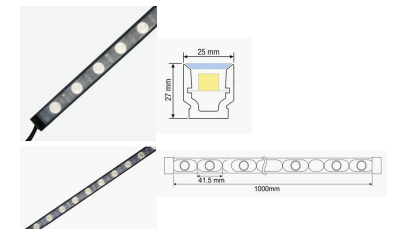

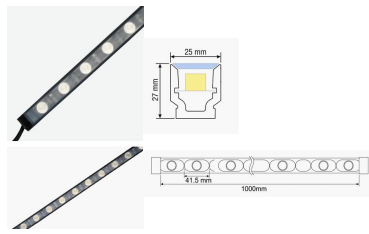
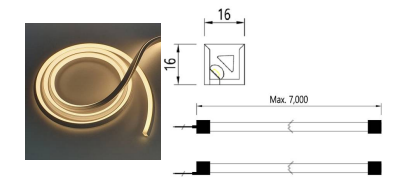
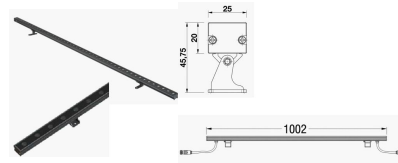
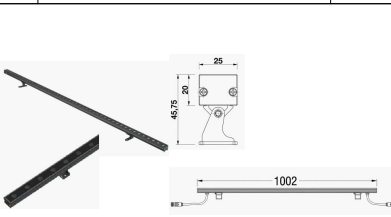
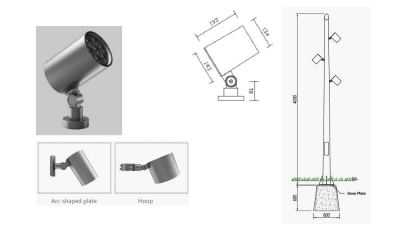

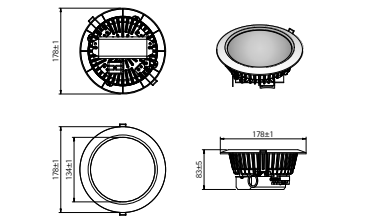
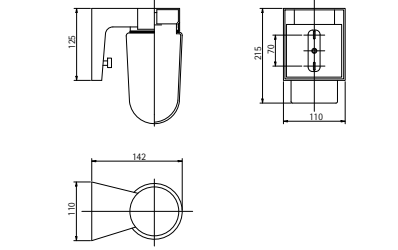
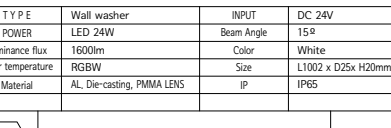

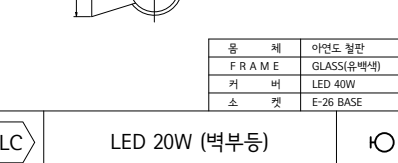
																																											
TYPE		스텝등(매입)		INPUT		DC 24V		TYPE		스텝등(벽부)		INPUT		DC 24V		TYPE		다운라이트(직부)		INPUT		AC 220V 60Hz		TYPE		다운라이트(매입)		INPUT		DC 24V																	
POWER		LED 5W		Beam Angle		Asymmetric		POWER		LED 4.5W		Beam Angle		Asymmetric		POWER		LED 15W		Beam Angle		15, 24, 36, 60°		POWER		LED 7W		Beam Angle		15°, 24°, 36°																	
Luminance flux		425lm		Color		Gray		Luminance flux		170lm		Color		Dark Gray		Luminance flux		1200lm		Color		Black		Luminance flux		392lm		Color		White, Black																	
Color temperature		3000K		Size		D160 x W160 x H33mm		Color temperature		3000K		Size		D100 x W100 x H30mm		Color temperature		3000K		Size		Ø128 x H65mm		Color temperature		3000K		Size		Ø52 x H72mm (타공 : Ø45)																	
Material		AL, Die-casting		IP		IP65		Material		AL, Die-casting		IP		IP65		Material		AL, Die-casting, Tempered glass		IP		IP66		Material		AL, Die-casting		IP		IP65																	
ST-1		LED 5W (매입 스텝등)				ST-1		ST-2		LED 4.5W (벽부 스텝등)				ST-2		DL-1		LED 15W (다운라이트)				DL-1		DL-1A		LED 7W (다운라이트)				DL-1A		DL-2		LED 9W (다운라이트)				DL-2		DL-3		LED 9W (다운라이트)				DL-3	
																																															
TYPE		다운라이트(매입)		INPUT		DC 24V		TYPE		다운라이트(매입)		INPUT		DC 24V		TYPE		벽등		INPUT		DC 24V		TYPE		블라드		INPUT		AC 220V 60Hz		TYPE		수목등		INPUT		DC 24V									
POWER		LED 12W		Beam Angle		15°, 24°, 36°, 50°		POWER		LED 7W		Beam Angle		15°, 24°, 36°		POWER		LED 12W x2		Beam Angle		24°		POWER		LED 12W		Beam Angle		Symmetric		POWER		LED 5W		Beam Angle		25°, 36°, 45°, 60°									
Luminance flux		1000lm		Color		White, Black		Luminance flux		392lm		Color		White, Black		Luminance flux		1455lm		Color		Dark Gray		Luminance flux		1000lm x2		Color		Gray		Luminance flux		1100lm		Color		Dark gray									
Color temperature		3000K		Size		Ø84 x H85mm (타공 : Ø75)		Color temperature		3000K		Size		Ø52 x H72mm (타공 : Ø45)		Color temperature		3000K		Size		W80 x D80 x H90mm		Color temperature		3000K		Size		W120 x D145 x H128mm		Color temperature		3000K		Size		Ø60 x H60mm									
Material		AL, Die-casting		IP		IP65		Material		AL, Die-casting		IP		IP65		Material		AL, Die-casting		IP		IP66		Material		AL, Die-casting		IP		IP66		Material		AL, Die-casting		IP		IP65									
DL-4		LED 12W (다운라이트)				DL-4		DL-5		LED 7W (다운라이트)				DL-5		DL-6		LED 15W (다운라이트)				DL-6		BK-1		LED 12W x2 (벽등)				BK-1		BL-1		LED 12W (블라드등)				BL-1		SP-1		LED 5W (수목등)				SP-1	
																																															
TYPE		라인간접조명(Flexible)		INPUT		DC 24V		TYPE		라인바		INPUT		DC 24V		TYPE		라인간접조명(Flexible)		INPUT		DC 24V		TYPE		라인간접조명(Flexible)		INPUT		DC 24V		TYPE		라인바		INPUT		DC 24V									
POWER		LED 14W/m		Beam Angle		115°		POWER		LED 26W/m		Beam Angle		25°, 35°		POWER		LED 14W/m		Beam Angle		115°		POWER		LED 26W/m		Beam Angle		115°		POWER		LED 14W/m		Beam Angle		115°									
Luminance flux		945lm		Color		White		Luminance flux		1620lm		Color		White		Luminance flux		945lm		Color		White		Luminance flux		1620lm		Color		White		Luminance flux		945lm		Color		White									
Color temperature		3000K		Size		Max,7000 x D16 x H16mm		Color temperature		3000K		Size		L1000 x D25 x H27mm		Color temperature		3000K		Size		Max,7000 x D16 x H16mm		Color temperature		3000K		Size		Max,7000 x D16 x H16mm		Color temperature		3000K		Size		Max,7000 x D16 x H16mm									
Material		Silicone		IP		IP67		Material		Silicone		IP		IP65		Material		Silicone		IP		IP67		Material		Silicone		IP		IP65		Material		Silicone		IP		IP67									
LL-1		LED 14W/m (라인간접조명)				LL-1		LL-2		LED 26W/m (라인바)				LL-2		LL-3		LED 14W/m (라인간접조명)				LL-3		LL-4		LED 26W/m (라인바)				LL-4		LL-5		LED 14W/m (라인간접조명)				LL-5		FL-1		LED 24W (선형 투광등)				FL-1	
																																															
TYPE		Wall washer		INPUT		DC 24V		TYPE		투광등 (멀티폴)		INPUT		AC 220V 60Hz		TYPE		라인간접조명(Flexible)		INPUT		DC 24V		TYPE		라인간접조명(Flexible)		INPUT		DC 24V		TYPE		라인바		INPUT		DC 24V									
POWER		LED 24W		Beam Angle		15°		POWER		LED 36W x 3		Beam Angle		9, 18, 22, 39, 51°		POWER		LED 14W/m		Beam Angle		115°		POWER		LED 26W/m		Beam Angle		115°		POWER		LED 14W/m		Beam Angle		115°									
Luminance flux		1600lm		Color		White		Luminance flux		3370lm		Color		Matte Gray		Luminance flux		945lm		Color		White		Luminance flux		1620lm		Color		White		Luminance flux		1600lm		Color		White									
Color temperature		RGBW		Size		L1002 x D25x H20mm		Color temperature		3000K		Size		Ø134 x H193mm		Color temperature		3000K		Size		Max,7000 x D16 x H16mm		Color temperature		3000K		Size		Max,7000 x D16 x H16mm		Color temperature		RGBW		Size		L1002 x D25x H20mm									
Material		AL, Die-casting, PMMA LENS		IP		IP65		Material		AL, Die-casting		IP		IP66		Material		Silicone		IP		IP67		Material		Silicone		IP		IP67		Material		AL, Die-casting, PMMA LENS		IP		IP65									
FL-2		LED 24W (선형 투광등)				FL-2		PL-1		LED 36W x 3 (멀티폴 투광등)				PL-1		LA		LED 40W (매입등)				LA		LB		LED 20W (다운라이트)				LB		LC		LED 20W (벽부등)				LC		LB							
																																															
용 체		ALUMINUM		용 체		아연도 침판		용 체		ALUMINUM		용 체		아연도 침판		용 체		ALUMINUM		용 체		아연도 침판		용 체		ALUMINUM		용 체		아연도 침판		용 체		ALUMINUM		용 체		아연도 침판									
F R A M E		ALUMINUM		F R A M E		GLASS(온백색)		F R A M E		ALUMINUM		F R A M E		GLASS(온백색)		F R A M E		ALUMINUM		F R A M E		GLASS(온백색)		F R A M E		ALUMINUM		F R A M E		GLASS(온백색)		F R A M E		ALUMINUM		F R A M E		GLASS(온백색)									
커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE		커 버		POLY CARBONATE									
배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)		배터리 내장형 (소켓 감정용)											